

p.n. Reolink Duo PoE

## Outdoor Bullet camera, Dual lens 150° Angle, PoE, 4MP, Night Vision, IP66, Two-Way Audio

### Overview

- Smart 2K PoE Camera with Dual Lenses
- 150° Wide Viewing Angle\*
- Person/Vehicle Detection
- Power over Ethernet
- Color Night Vision



### Dual Lenses for More Home Security

This new camera becomes so distinctive due to its dual lenses that monitor a much larger area than traditional cameras do. It enables you to see from a 150° wide viewing angle\* and produces low distortion. You can enjoy more sights and home security.

- Dual Lenses
- 150° Wide Viewing Angle\*

### Keep You Safe, Day & Night

When a person, vehicle or other moving object approaches your home, the camera will smartly tell their differences and send you accurate alerts. Its spotlights and siren will also be triggered to deter unwanted intruders.

- Person/Vehicle Detection
- Accurate Alerts
- Without Subscription



### Clear Night Vision with Color

Night vision has been greatly improved with eight powerful spotlights and infrared LEDs. You can view clear details in full color and get your home well protected day and night.

- 8 Spotlights
- Color Night Vision




### Multiple Recording Options

This smart IP camera supports 24/7 continuous, motion-triggered, or scheduled recordings. All the videos can be saved to the micro SD card, Reolink NVR or FTP server. Choose a way you like and enjoy customized security.

### Micro SD Card Slot

Supports up to 256GB micro SD card (not included).

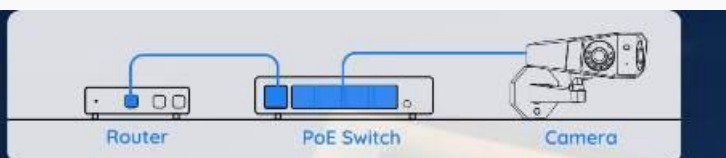

### Easy Installation & Control

#### PoE Setup: Time-Saving and Cost-Effective

Thanks to Power over Ethernet (PoE) technology, this IP camera can transmit videos and be charged simultaneously via only one network cable. You can install this camera quickly and nicely.

- Plug & Play
- Reliable Connection

### Stay Weatherproof & Reliable

Encased in the rugged housing, Reolink Duo PoE is IP66 waterproof and can withstand harsh weather conditions. Indoors and outdoors, it always works so well to protect your home.

**IP66** Certified Weatherproof



### Remote Access & Control

Reolink App & Client are great for you to quickly configure the camera and make full use of its magnificent functions.

#### Real-Time Alerts

When the camera detects something suspicious, it will immediately send real-time alerts to your device with a snapshot so that you can take quick action.

#### Live View from Everywhere

Wherever you are, you can always know what's going on in your home with live video and audio. Take your phone when going out and everything is under control.

#### Easy & Smart Playback

Replaying recordings is so easy when you locate them by date and timeline. Sharing fun moments or keeping crucial evidence, you won't miss any important events.

#### Customized Motion Zone

Your privacy is highly valued. You can freely customize the motion zone by masking out the area where you don't want the camera to detect motions.



## Specification

<b>Video &amp; Audio</b>	Image Sensor	1/3" CMOS Sensors
	Video Resolution	Default: 2560X1440 (4.0 Megapixels) at 22 frames/sec
	Lens	f = 4.0 mm fixed, F = 2.0
	Video Format	H.264
	Field of View	Horizontal: 150° Vertical: 44°
	Day & Night	Auto-switching with IR cut filter
	Infrared Night Vision	30 Meters (LED: 6pcs/20mil/850nm)
	Color Night Vision	Spotlight: 8pcs/5W/6500K/560 Lumens
	Audio	Two-way audio
<b>Power</b>	POE	IEEE 802.3af, 48V Active
	DC Power	DC 12V=2A, <12W
<b>Interface</b>	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps; RJ45
	Storage	Micro SD card slot (Max. 256GB)
	Audio	Built-in microphone and speaker
<b>Software Features</b>	Frame Rate	Mainstream: 2fps - 25fps (default: 22fps) Substream: 4fps - 15fps (default: 10fps)
	Code Rate	Mainstream: 1024Kbps - 5120Kbps (default: 4096Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
	Browser Supported	IE, Edge, Chrome, Firefox, Safari
	OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
	Smart Alarm	Motion detection/person detection/vehicle detection
	Record Mode	Motion-triggered recording (default); scheduled recording; 24/7 recording
	Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
	Maximal User Access	20 Users (1 admin account & 19 user accounts); Support up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
<b>Working Environment</b>	Temperature	Operating temperature: -10°C~+55°C (14°F~131°F)
	Humidity	Operating humidity: 10% ~ 90%
	Waterproof	IP66
<b>Size &amp; Weight</b>	Dimension	195x103x56 mm
	Weight	650g

## Installation



What's in the box

