




MP3 Amplifier with Timer

(For Small Scheduled Application eg. coffee shop & chain store)

MPT60/MPT120/MPT240

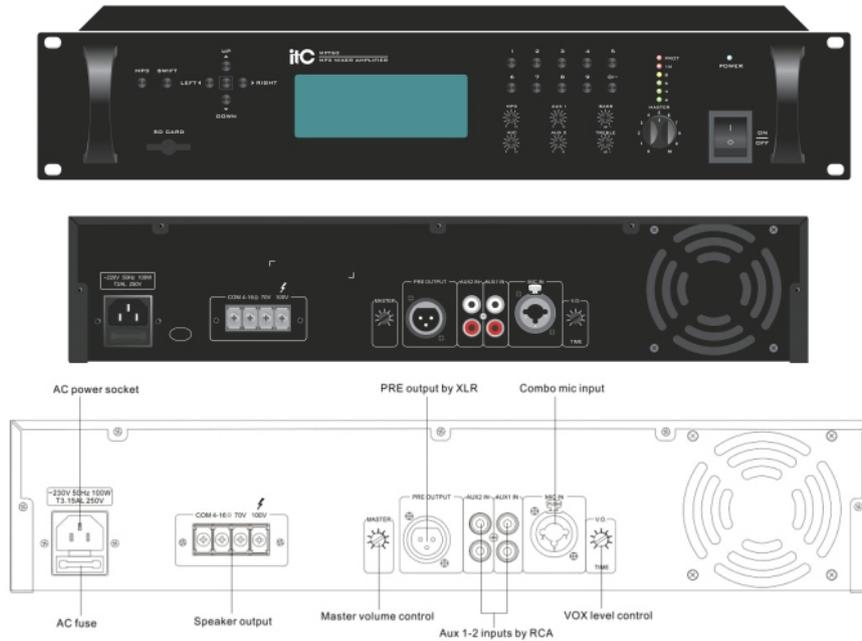

Description:

- * Mixer amplifier with MP3 source (SD card storage), programmable to play MP3 music.
- * Suitable for small background music playing places

Features:

- * Large LCD display, simple operation interface, and support Chinese and English bilingual operation.
- * Mixer amplifier built-in MP3 and weekly timer.
- * Play, all play, circle, repeat, random play modes.
- * The program consists of four sets of main program and one set of standby program; Support number key to select the playback.
- * Bass/treble tone control and volume control for MP3, Mic, Aux1-2 and master volume control.
- * Priority: MIC > line input > MP3 audio source.
- * Built-in high and low pitch adjustment function, and automatic control gain voltage limit function.
- * Automatically cut off the main power supply function when there is no sound source signal, and automatically enter the energy-saving mode.
- * Speaker output: 70V, 100V and 4-16Ω.
- * Extensive protection include high temp, overload and short circuit.

Specifications:

Model	MPT60	MPT120	MPT240
Power Output(THD 1%)	60W	120W	240W
Speaker Outputs	70V, 100V & 4~16Ω		
MIC Input Sensitivity/Impedance	5mV/600Ω		
AUX 1-2 Input Sensitivity/Impedance	350mV/10KΩ		
S/N Ratio	≥66dB		
SD File System	Support both FAT16 and FAT32, do not support file format Supports up to 2G-1 bytes as the file size.The maximum number of playable files is 65534. Sorts and plays up to 100 files in the order of UNICODE.		
MP3 Format	Supports MPEG audio 1, 2 and 2.5. Supports Layer 1, 2 and 3. Supports sample rates 8k, 16k, 32k, 11.025k, 22.05k, 44.1k, 12k, 24k and 48kHz. Supports bit rate 8 to 320 kbps and VBR (Variable Bit Rate).Except free format.		
MP3	Support MP3 format, max capacity of 32G		
Frequency Response	50Hz~18KHz (±3dB)		
Tone (Bass: 100Hz, Treble: 10KHz)	±10dB		
Pre Output	1V/600Ω		
THD	≤0.1% at 1KHz, 1/3 rated power		
Program Steps	Total 512 Steps, 1 day≤200 Steps		
Time Mode			
Power Supply	~110V-230V 50/60Hz		
Power Consumption	100W	180W	350W
Dimensions	484 x 358 x 88mm		
Weight	9.18Kg	10.32Kg	12.12Kg